


Recommended Minimum Fastener Locations For AH 7600 & ADS 7650 Slides - #10-32 18-8 Stainless Steel Minimum

Assuming an evenly distributed load on shorter slides, one should install 4 #10-32 18-8 Stainless Steel screws in each member, in the endmost holes at a minimum. The longer slides require additional fasteners per the below configuration.

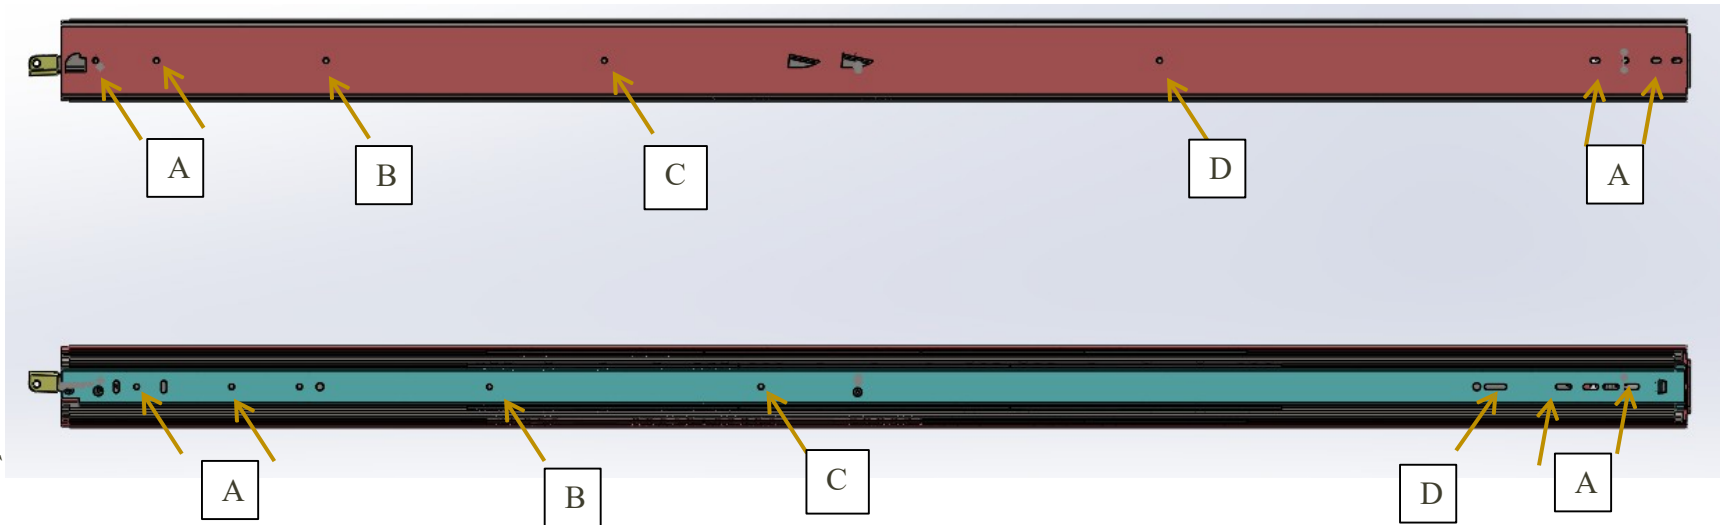

Holes	Screw Required
A	All Lengths
B	30"- 60"
C	36"- 60"
D	42"- 60"